



CHECK VALVES AND FLANGED STRAINERS

MV-1220

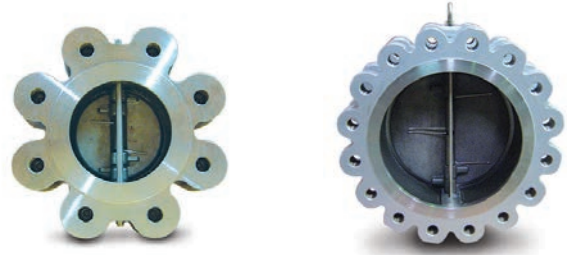
**Design Feature**

- Design per API 594
- 1-1/2" – 60" (DN40 - DN1500)
- Wafer type Dual plate

- Flange dia. : ASME B16.5, ISO 7005 / BS10-Table A/D/E/F
- JIS B2338 / API 605

Body	Cast / Ductile Iron
	Stainless / Carbon Steel
Plate	SS316 / SS304 / WCB
Seat	NBR / EPDM / Viton / Metal
Pressure Rating	ASME B16.5 Class 150/300/600/900/1500/2500
	EN1092-1 PN 10/16/25/40
	JIS 5K/10K/20K

MV-1221

**Design Feature**

- Design per API 594
- 1-1/2" – 24" (DN40 - DN600)

- Lug type Dual plate

Body	ASTM A351 Gr.CF8M
Plate	ASTM A351 Gr.CF8M / A182 Gr.F316
Flange Dia.	ASME B16.5 Class 150/300/600 RF
	EN1092-1 PN 10/16/25/40
	JIS 5K/10K/20K

MV-1222

**Design Feature**

- 2" – 24" (DN50 - DN600)
- Wafer type Swing Check Valves

Body	Carbon / Stainless Steel
Plate	SS316 / SS304
Seat	NBR / EPDM / Viton / PTFE / Metal
Flange Dia.	Class 150 / 300 / PN 10 / 16 / 25 / 40

WA-001

**Design Feature**

- 1/2" – 8" (DN15 - DN200)
- Wafer type Spring Check Valves

Body	EN 1.4408
Disc / Spring	EN 1.4408 / SS316
Face to Face	DIN 3202 K4
Pressure rating	PN 40 for DN15-DN100
	PN 25 for DN125-DN150

MV-1225

**Design Feature**

- 2" – 24" (DN50 - DN600)
- Wafer type Check Valves

Body	Carbon / Stainless Steel
Plate	SS316 / SS304
Seat	NBR / EPDM / Viton / PTFE / Metal
Pressure rating	Class 150/300/600/900
	PN 10/16/25/40
	JIS 5K/10K/20K

FLANGED STRAINER YF-150 / 300 / PN / JIS

**Design Feature**

- 1/2" – 16" (DN15 - DN400)
- Y type Strainer

Body	ASTM A351 Gr.CF8M
Screen	SS304
Face to Face	MFG. Standard
Flange Dia.	B 16.5 Class 150 / 300 RF
	EN1092-1 PN 10/16/25/40 RF
	JIS 10K